



# MOBILE CONTAINER SALES



## Portable Storage Manufacturer & Supplier



### SPCIFICATIONS

- ❖ 7'-3-1/2" wide X 7-10" high X 20'-1-1/2" long
- ❖ Empty weight: 2,200 lbs.
- ❖ Forklift tubes 6" x 3" - 80" OC
- ❖ Forklift tubes 6" x 3" - 48" OC
- ❖ Integrated receivers for wheels
- ❖ Integrated tubes for D-Rings
- ❖ Composite wall panels
- ❖ Recessed threshold
- ❖ 3/4" flooring over 24" on center I beams
- ❖ One piece sealed and riveted aluminum roof
- ❖ Full width roll up door or swing doors optional
- ❖ Stackable 3 high fully loaded
- ❖ Payload capacity @7,500 lbs.
- ❖ Galvanized steel frames

### OPTIONS

- ❖ Galvanized Steel Finish \$5,690
- ❖ Roll Door No extra charge
- ❖ Wheel Inserts No extra charge
- ❖ Customize with your Company Logo (2) 4' X 8' decals add \$245 per unit
- ❖ 14 of Our 20 ft. containers can ship on one flatbed semi

### PRICING




# MOBILE CONTAINER SALES



## Portable Storage Manufacturer & Supplier


### Roof Structure

- 4 Custom formed angles \*7-1/2" X 3" \*10 gauge
- 2 Tie down angles
- 4 Custom corner roof gussets
- 7 Roof bows @ 30" centers
- 4 Forged d-rings
- Pre-punched perimeter alignment holes for wall panels

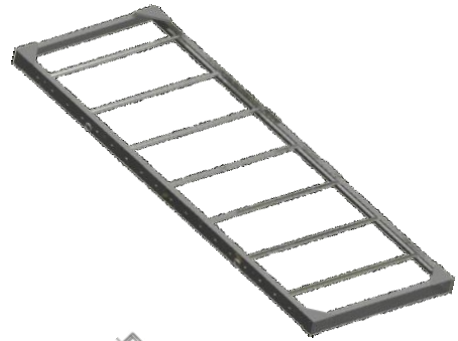

### Floor Structure

- 3 Custom formed base rails \* 10 gauge
- 2 Custom formed C-Channel \* 10 gauge
- 9 I Beams \* 2-1/4" X 4" X 1/8"
- 4 lifting tubes \* 6" X 3" X 1/8"
- 4 wheel receiver tubes \* 2-1/2" X 2-1/2" X 3/16"
- 2 D- Rings tubes \* 2-1/2" X 2-1/2" X 3/16
- Pre-punched perimeter alignment holes for wall panels

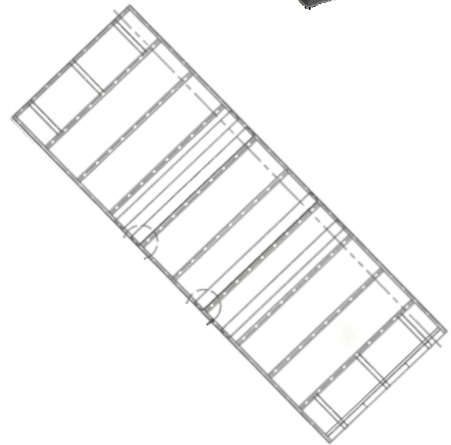

### Wall Section

- Custom formed corner posts \*10 gauge  
Pre-punched alignment holes to attach to base & wall panels
- Composite Wall Panels**
- Panels are composed of two, coil-coated metal skins laminated between a low-density, polyethylene core
- Lightweight. Durable. Flexible

